



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
09/589,881	06/09/2000	Jeongmin Moon	3430-0105P	1734

7590 09/17/2010
Birch Stewart Kolasch & Birch LLP
P O Box 747
Falls Church, VA 22040-0747

EXAMINER

NGUYEN, HOAN C

ART UNIT	PAPER NUMBER
----------	--------------

2871

MAIL DATE	DELIVERY MODE
-----------	---------------

09/17/2010

PAPER

Please find below and/or attached an Office communication concerning this application or proceeding.

The time period for reply, if any, is set in the attached communication.

Art Unit: 2871

DETAILED ACTION***Response to Amendment***


Applicant's arguments with respect to the amended claims 1, 10-11 and new claims 25-27 based on the Response filed on 08/13/2010 have been considered but are moot in view of the new ground(s) of rejection. Therefore, this is Final action.

Claims 3-5, 12-13, 19-20 and 22-23 are cancelled.


Claims 25-27 are newly added.

Thus, claims 1-2, 6-11, 14-18, 21 and 24-27 are pending.

The new claims 25-27 recites the features of "the angle (*inclined angle or slope angle*) between the side surface and a line perpendicular to the planar surface is about between 0° and 10° ", which is rejected by Shinji et al. (US6259854B1) as shown in Figures 2 and 4 below:

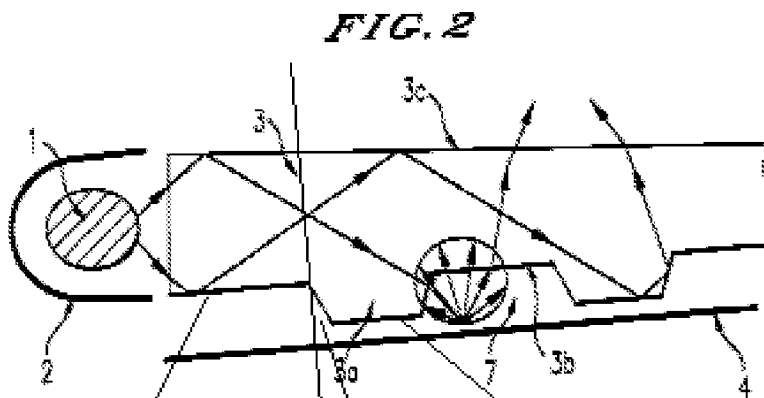

lower surface is parallel to planar surface; therefore the the angle between the side surface and a line perpendicular to the planar surface equal to the inclined angle

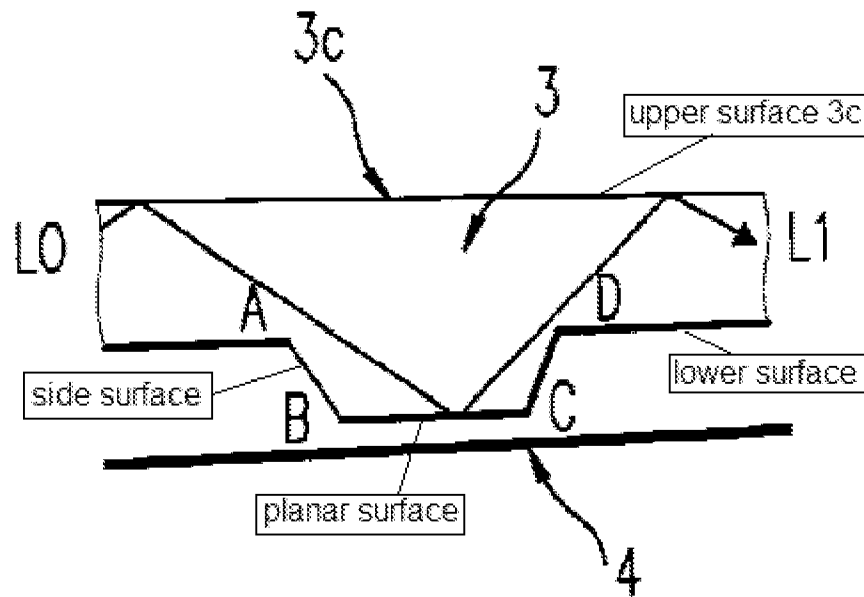

In regard to claims 1 and 2, Shinji et al. (Figs. 1 a-15b) disclose an auxiliary light source device comprising:


- a light source 1;
- a light reflecting member (reflector 4) which guides light from the light source into the light directing member,
- a light directing member 3 for directing incident light from the light source toward the reflector, with this structure of the light directing member 3, the light ray L4 can be outwardly along an orthogonal direction if L4 strikes the convex portion at different angle (see Examiner Answer mailed on 6/01/2005, Reply Brief Note mailed on 6/14/2006 and 11/20/2006).
- the light directing member including
 - an upper surface 3c and lower surface 3b

Art Unit: 2871

- a lower surface having a plurality of convex portions extending from the lower surface, each of the convex portions having a substantially planar surface which is substantially parallel to the lower surface, and a side surface connecting the planar surface and lower surface, and a side surface angle δ between the lower surface and the side surface of the convex portion is about 90° since a side surface angle $\delta = 0^\circ$ or 2° (col. 7 lines 5-6).

wherein

- the plurality of convex portions have the same side surface angle δ with each other.
- light reflected along an orthogonal direction L2/L3 to the liquid crystal display device is uniform (to emit primary light inputted from the side end plane of the light guide uniformly, in abstract and col. 1 lines 27-28) according to Figs. 5 ($\delta = 0^\circ$) or Fig. 6 ($\delta = 2^\circ$) or Fig. 7 ($\delta = 5^\circ$).

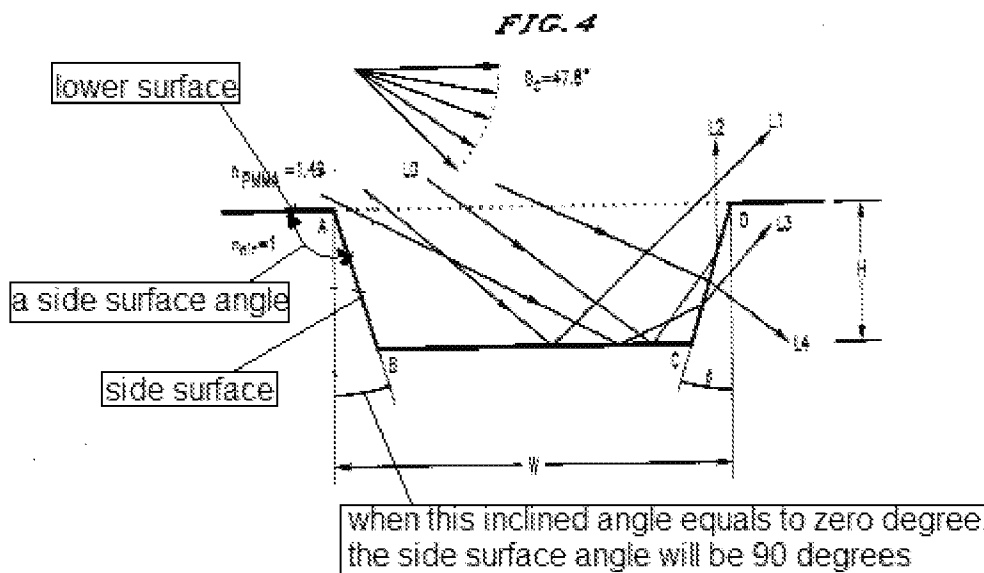

Art Unit: 2871

In regard to claims 21 and 24, Shinji et al. (Figs. 1 a-15b) disclose an auxiliary light source device comprising:

- a light source 1 extending along a width of the reflector to emit light along a length of the reflector 4;
- a light directing device 3 located above the reflector 4 and adjacent to the light source to direct light from the light source to the reflector such that a light distribution of light directed by the light directing device is substantially uniform along the length of the reflector, and such that the directed light is substantially perpendicular to the reflector;
- the light-directing device 3 includes upper surface 3c and lower surface 3b and a plurality of portions each extending from the lower surface 3b toward the reflector 4 at a 90° angle such that the light reflected along an orthogonal direction L2/L3 to the liquid crystal display device is uniform (to emit primary light inputted from the side end plane of the light guide uniformly, in abstract and col. 1 lines 27-28) according to Figs. 5 ($\delta = 0^\circ$) or Fig. 6 ($\delta = 2^\circ$) or Fig. 7 ($\delta = 5^\circ$), spacing between the portions decreasing along the length of the reflector with increasing distance from the light source. With this structure of the light directing member 3, the light ray L4 can be outwardly along an orthogonal direction if L4 strikes the convex portion at different angle (see Examiner Answer mailed on 6/01/2005, Reply Brief Note mailed on 6/14/2006 and 11/20/2006), wherein the each portion includes a planar surface which is substantially parallel to the lower surface.

Art Unit: 2871

In regard to claims 11 and 14, Shinji et al. (Figs. 1 a-15b) disclose an auxiliary light source device comprising:

- an upper reflective surface to reflect impinging light above a certain incidence angle; Example see in Fig. 2, upper reflective surface is 3c.
- a lower reflective surface 3b having a plurality of convex portions extending toward the reflector to direct light from the auxiliary light source device to the reflector outwardly along an orthogonal direction; with this structure of the light directing member 3, the light ray L4 can be outwardly along an orthogonal direction if L4 strikes the convex portion at different angle (see Examiner Answer mailed on 6/01/2005, Reply Brief Note mailed on 6/14/2006 and 11/20/2006)
- an entry surface facing to the light source 1 connecting the upper and lower reflective surfaces through which light from a light source enters,
 - each convex portion includes a planar portion which is substantially parallel to the lower reflective surface and sides connecting the planar portion with the lower reflective surface, and a side surface angle δ between the lower surface and the side surfaces is about 90° since a side surface angle $\delta = 0^\circ$ or 2° (col. 7 lines 5-6) or 5° (col. 6 lines 62).

Wherein

- the plurality of convex portions have the same side surface angle δ with each other.
- light reflected along an orthogonal direction L2/L3 to the liquid crystal display device is uniform (to emit primary light inputted from the side end plane of the

Art Unit: 2871

light guide uniformly, in abstract and col. 1 lines 27-28) according to Figs. 5 ($\delta = 0^\circ$) or Fig. 6 ($\delta = 2^\circ$) or Fig. 7 ($\delta = 5^\circ$).

- a planar portion is substantially parallel to the lower reflective surface (claim 14).

In regard to claims 6 and 15, Shinji et al. (Fig. 1 b) disclose the planar surface of each convex portion has a cross-section of substantially circular shape (Fig. 1 b).

In regard to claims 7 and 16, Shinji et al. (Fig. 1f) disclose the planar surface of each convex portion has a cross section of rectangular shape (Fig. 11f),


In regard to claims 8 and 17, Shinji et al. (Fig. 1 d or 1 g) disclose the plane surface of the plurality of convex portions has a bar shape extending perpendicular to a direction of light propagation in the light directing member 11 and along substantially an entire width of the reflective LCID device.

In regard to claim 9, Shinji et al. (Fig. 15b) disclose (Table 1) a distance/height between the lower surface and the planar surface of each convex portion is $12\mu\text{m}$ and $20\mu\text{m}$ that is less than $50\mu\text{m}$.

In regard to claim 18, Shinji et al. (Fig. 15b) disclose a plurality of convex portion extending from the lower surface to ensure an uniform distribution of light along a length of the device (in abstract).

Art Unit: 2871

In regard to claims 25 and 27, Shinji et al. (Fig. 6-8) disclose the angle (*inclined angle or slope angle*) between the side surface and a line perpendicular to the planar surface is about between 0° and 10° .

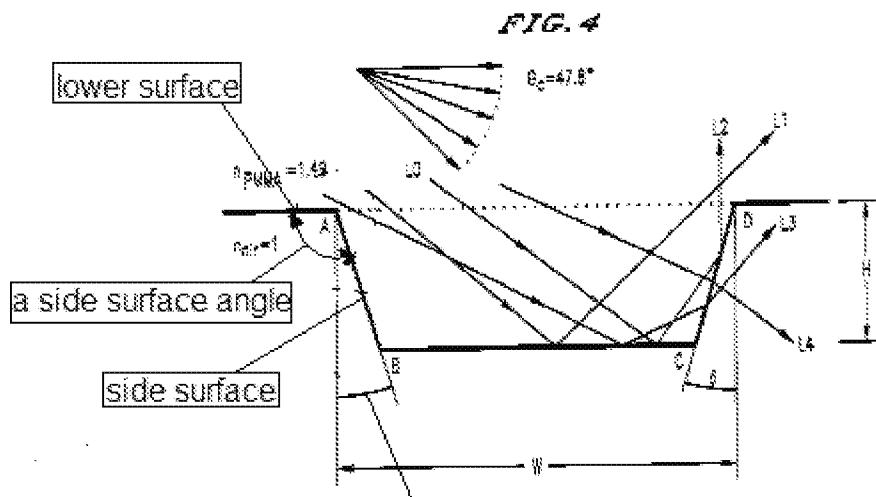


this inclined angle is 2 degrees as shown in the graph Fig. 6 or 5 degrees as shown in the graph Fig. 7 or 10 degrees as shown in the graph Fig. 8

However, Shinji et al. fail to disclose (a) upper surface (upper reflective surface) and lower surface (lower reflective surface) parallel to each other (b) the light directing member having a size of the plurality of convex portions increases with increasing distance from the light source.

Ishikawa et al. teach (Fig. 30) (a) upper surface 1b (upper reflective surface) and lower surface 1c (lower reflective surface) parallel to each other (b) the light directing member having a size of the plurality of convex portions increases with

Art Unit: 2871


increasing distance from the light source the light directing member having a size of the plurality of convex portions increases with increasing distance from the light source for obtaining a bright surface light source device with a uniform brightness distribution (col. 2 lines 63-65).

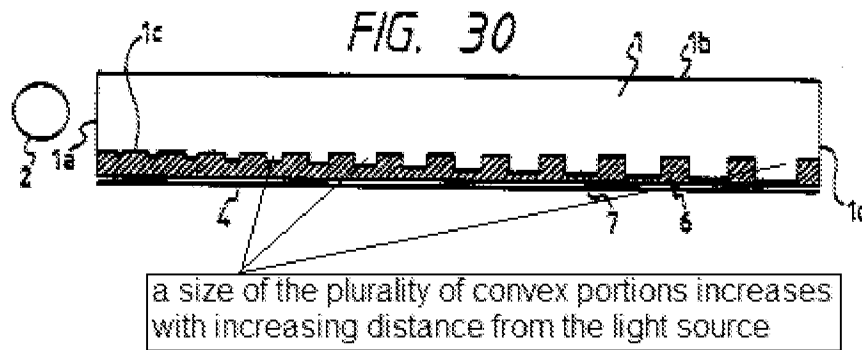

Therefore, it would have been obvious to one having ordinary skill in the art at the time the invention was made to further modify a liquid crystal display device as Shinji et al. disclosed with (a) upper surface 1b (upper reflective surface) and lower surface 1c (lower reflective surface) parallel to each other (b) the light directing member having a size of the plurality of convex portions increases with increasing distance from the light source the light directing member having a size of the plurality of convex portions increases with increasing distance from the light source for obtaining a bright surface light source device with a uniform brightness distribution (col. 2 lines 63-65) as **Ishikawa et al.** taught.

Art Unit: 2871

2. Claim 10 is rejected under 35 U.S.C. 103(a) as being unpatentable over Funamoto et al. (EP 08878720A) in applicant's IDS in view in view of **Ishikawa et al. (US5575549A)**.

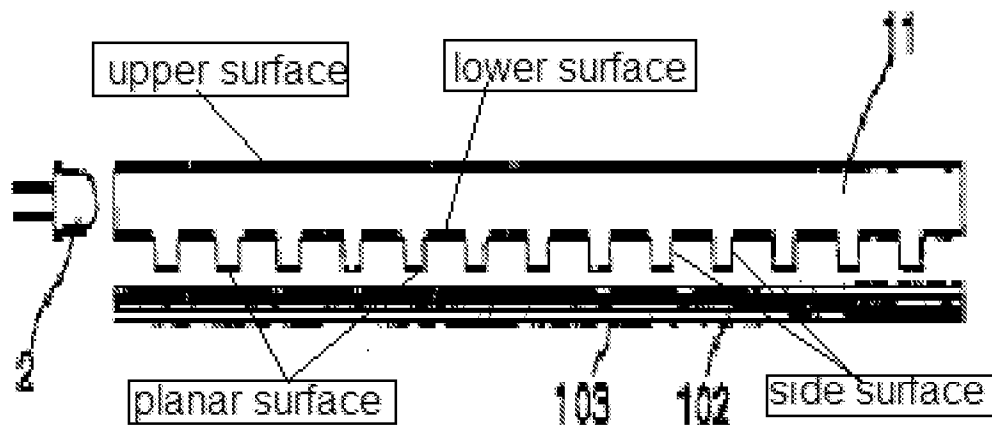

Funamoto et al. teach (Fig. 10, third embodiment, page 8 line 53 to page9 line 35) a reflective liquid crystal display device, comprising:

- a display panel 102 inherently including two substrates spaced apart, liquid crystal sandwiched between the two substrates, and
- a reflector 103 to reflect light through the liquid crystal;
- an auxiliary light source device for supplying light to the display panel, including,
 - a light source 2,
 - a light directing member (light guide plate 11) for directing incident light from the light source toward the display panel, the light directing member having an upper surface and a lower surface parallel to each other, the lower surface having a plurality of convex portions, each having a substantially planar surface which is substantially parallel to the lower

Art Unit: 2871


surface and a side surface connecting the planar surface and the lower surface, the side surface angle δ between the lower surface and a surface connecting the planar surface of the convex portion being about 90° , wherein light reflected along an orthogonal direction to the display panel is uniform which is inherent with this structure of convex portions at surface of light directing member (light guide plate 11),

- a light reflecting member which guides light from the light source into the light directing member, said display panel being between said auxiliary light source and said light reflecting member.

However, Funamoto et al. fail to disclose the light directing member having *a size of the plurality of convex portions increases with increasing distance from the light source*.

Ishikawa et al. teach (Fig. 30) the light directing member having *a size of the plurality of convex portions increases with increasing distance from the light source* for obtaining a bright surface light source device with a uniform brightness distribution (col. 2 lines 63-65).

Art Unit: 2871

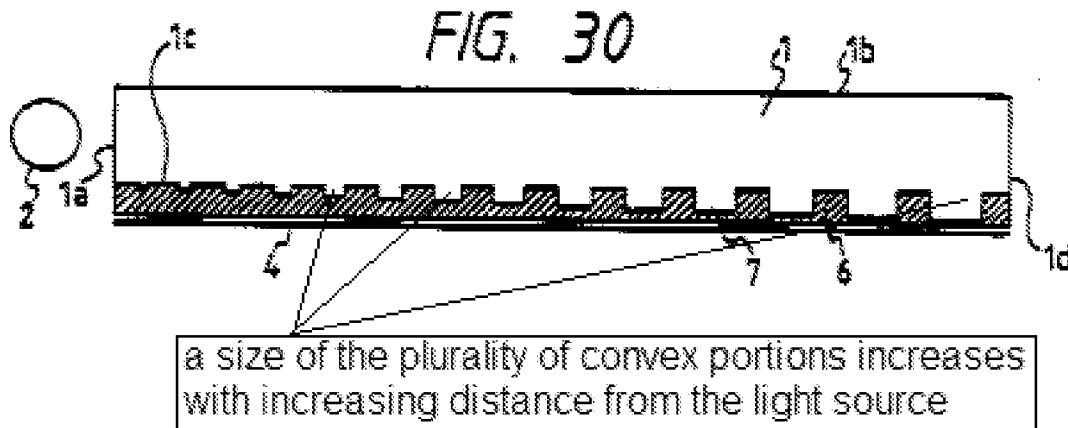


Therefore, it would have been obvious to one having ordinary skill in the art at the time the invention was made to further modify a liquid crystal display device as Funamoto et al. disclosed with the light directing member having *a size of the plurality of convex portions increases with increasing distance from the light source* for obtaining a bright surface light source device with a uniform brightness distribution (col. 2 lines 63-65) as **Ishikawa et al.** taught.

3. Claim 26 is rejected under 35 U.S.C. 103(a) as being unpatentable over Funamoto et al. (EP 08878720A) in applicant's IDS in view in view of Ishikawa et al. (US5575549A) as applied to claim 10 and in further view of Shinji et al. (US6259854B1).

Funamoto et al. fail to disclose the angle (*inclined angle or slope angle*) between the side surface and a line perpendicular to the planar surface is about between 0° and 10°.

Art Unit: 2871

Shinji et al. (Fig. 6-8) disclose the angle (*inclined angle or slope angle*) between the side surface and a line perpendicular to the planar surface is about between 0° and 10° for manipulating scattering reflection efficiency as shown in Figs. 6-8.

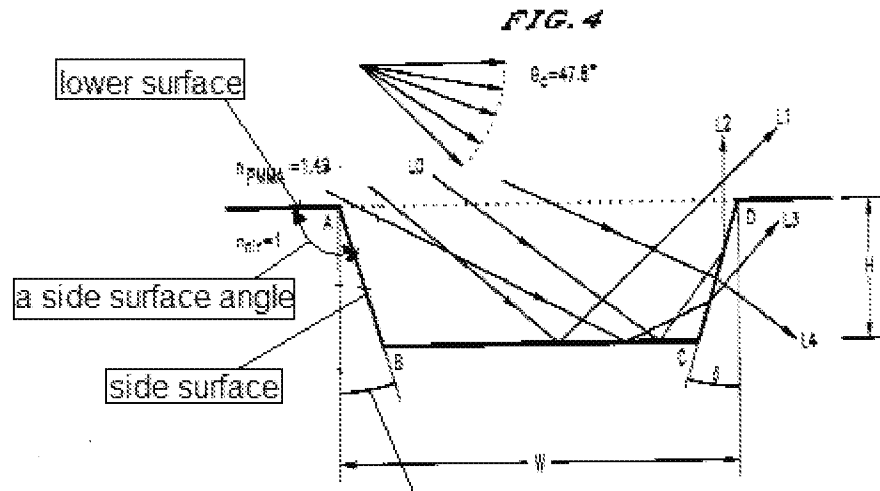

this inclined angle is 2 degrees as shown in the graph Fig. 6 or 5 degrees as shown in the graph Fig. 7 or 10 degrees as shown in the graph Fig. 8

Therefore, it would have been obvious to one having ordinary skill in the art at the time the invention was made to further modify a liquid crystal display device as Funamoto et al. disclosed with the angle (*inclined angle or slope angle*) between the side surface and a line perpendicular to the planar surface is about between 0° and 10° for manipulating scattering reflection efficiency as shown in Figs. 6-8 as Shinji et al. taught.

Conclusion

Applicant's amendment necessitated the new ground(s) of rejection presented in this Office action. Accordingly, **THIS ACTION IS MADE FINAL**. See MPEP § 706.07(a). Applicant is reminded of the extension of time policy as set forth in 37 CFR 1.136(a).

A shortened statutory period for reply to this final action is set to expire THREE MONTHS from the mailing date of this action. In the event a first reply is filed within TWO MONTHS of the mailing date of this final action and the advisory action is not mailed until after the end of the THREE-MONTH shortened statutory period, then the shortened statutory period will expire on the date the advisory action is mailed, and any extension fee pursuant to 37 CFR 1.136(a) will be calculated from the mailing date of the advisory action. In no event, however, will the statutory period for reply expire later than SIX MONTHS from the date of this final action.

Any inquiry concerning this communication or earlier communications from the examiner should be directed to HOAN C. NGUYEN whose telephone number is (571)272-2296. The examiner can normally be reached on MONDAY-THURSDAY:8:00AM-4:30PM.

If attempts to reach the examiner by telephone are unsuccessful, the examiner's supervisor, David Nelms can be reached on (571) 272-1787. The fax phone number for the organization where this application or proceeding is assigned is 571-273-8300.

Art Unit: 2871

Information regarding the status of an application may be obtained from the Patent Application Information Retrieval (PAIR) system. Status information for published applications may be obtained from either Private PAIR or Public PAIR. Status information for unpublished applications is available through Private PAIR only. For more information about the PAIR system, see <http://pair-direct.uspto.gov>. Should you have questions on access to the Private PAIR system, contact the Electronic Business Center (EBC) at 866-217-9197 (toll-free). If you would like assistance from a USPTO Customer Service Representative or access to the automated information system, call 800-786-9199 (IN USA OR CANADA) or 571-272-1000.

HOAN C. NGUYEN
Primary Examiner
Art Unit 2871

Chn
/HOAN C. NGUYEN/
Primary Examiner, Art Unit 2871